


NOTES:


- 1 This notch is only required for the original SMS.
- 2 This 3mm offset cut line can be applied to improve machinability, leaving half moon upstands.
- 3 See Options 1&2
- 4 This size includes 0.2mm per side body clearance.
- 5 The tolerance for these lugs is very important. (It maintains repeatability following a battery change and eliminates movement during fire. It has been recognised that some suppliers have reduced these to either 2 posts or in some cases removed them all together. This is not an acceptable condition, these posts are critical for reliable & accurate use of the Minisights).
- 6 These dimensions show the individual model widths and how they relate to the interface. All of the SHIELD Minisight products will fit this interface.
- 7. If your mount does not conform to this drawing then it could potentially invalidate your sight warranty.

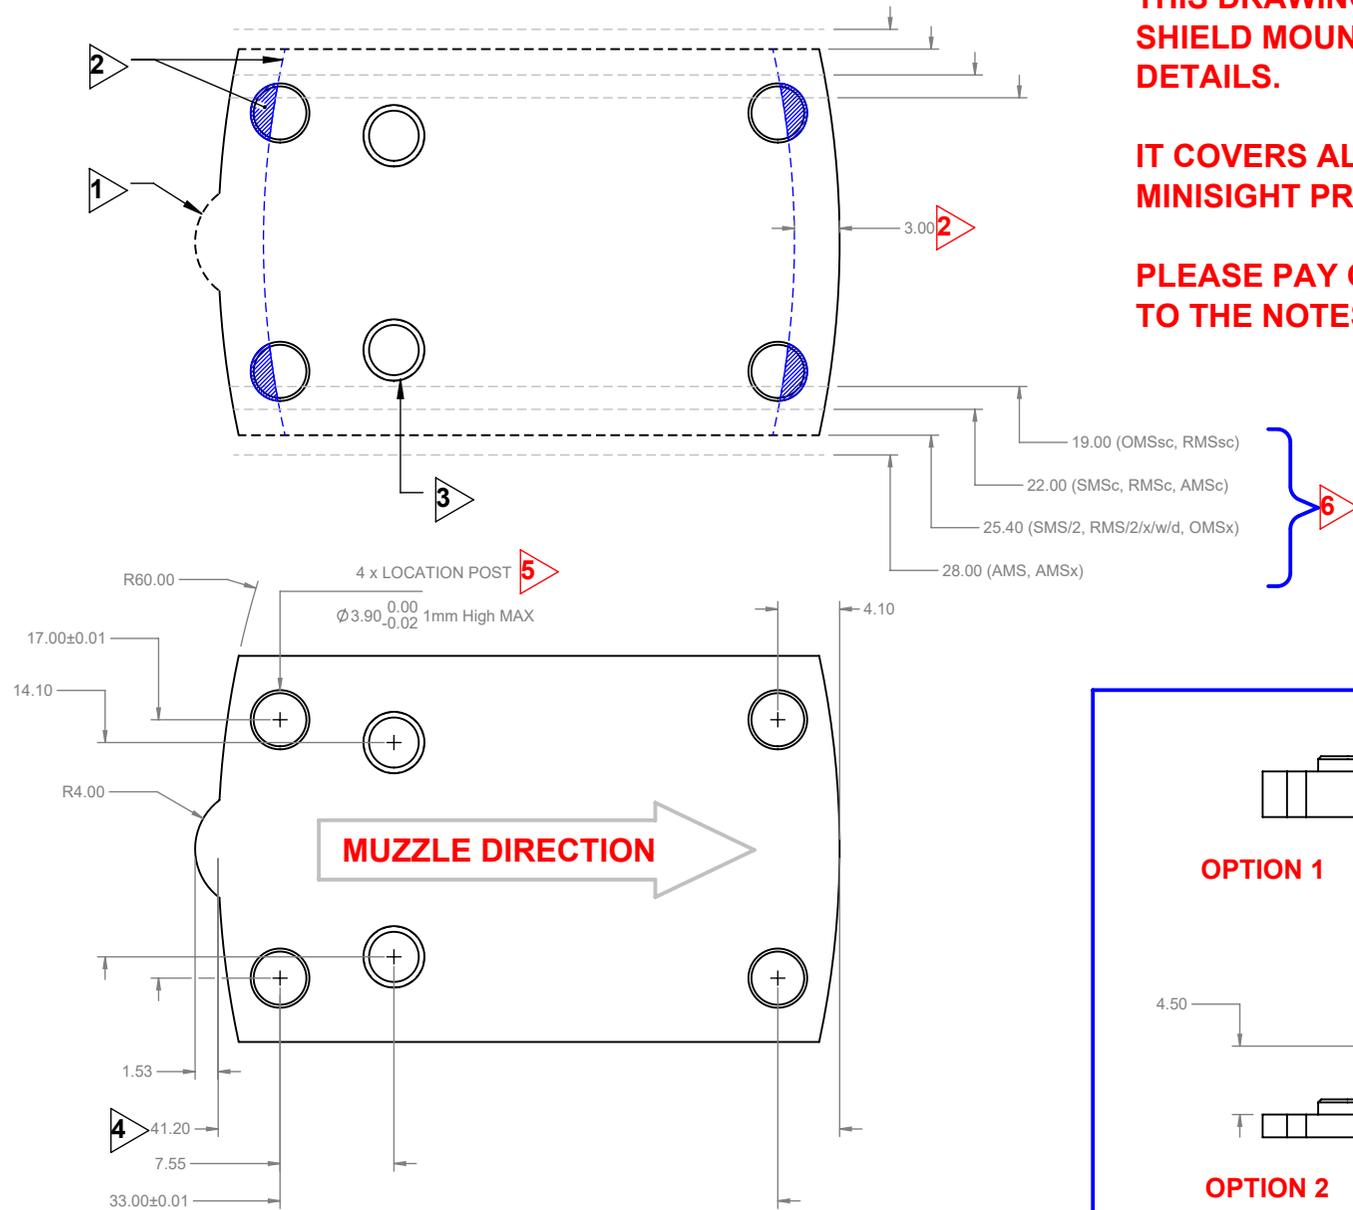

THIS DRAWING CONTAINS THE SHIELD MOUNTING INTERFACE DETAILS.


IT COVERS ALL OF THE SHIELD MINISIGHT PRODUCTS.

PLEASE PAY CLOSE ATTENTION TO THE NOTES AND OPTIONS.

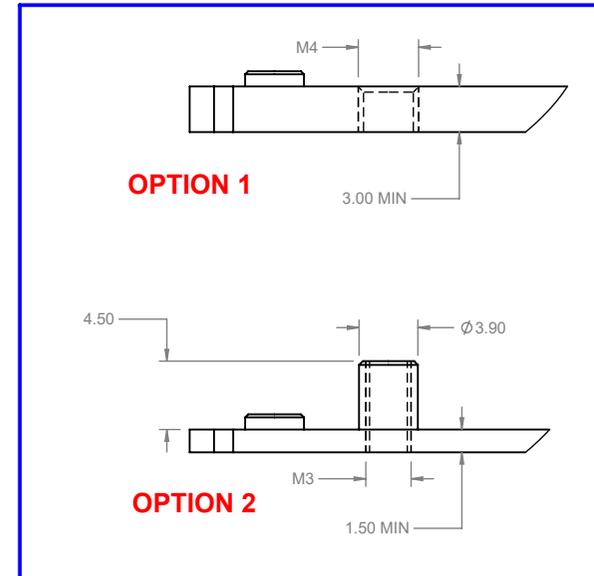

Drawn By M.Courtice Date 23/07/2025

SURFACE FINISH:
TOLERANCES:
LINEAR: +/- 0.05
ANGULAR: +/- 0.10



Unless otherwise specified:
Dimensions are in mm
DO NOT SCALE DRAWING

The details contained in this drawing are Shield Sights Ltd proprietary information. Reproduction in part or whole without the written permission of Shield Sights Ltd is prohibited. Company No. 02069725

Title:

SHIELD MINISIGHT INTERFACE (RMSc)

Scale: 2:1

Issue 02

Drawing size A4